DATUM

SCREENS & HARDWARE · MADE TO SURVEY

HARDWARE · HINGES

DH-GG90

Hinge · glass to glass · 90°

Door to fixed panel at 90°. Two 16 mm holes in the panel, one notch in the door.



SPECIFICATION

Glass	8, 10 mm toughened safety glass
Material	Solid brass
Max. door width	1000 mm / 2 hinges
Max. door weight	50 kg / 2 hinges
Opening	±90°, double action
Self-closing	From approx. 25°
Size	90 × 58 × 74 mm
Finishes	11 — see order codes

WHAT IT DOES


- Fixed panel: 2 × Ø16 mm holes at 50 mm centres
- Self-closing from approx. 25°
- Zero position set on the hinge after hanging
- Cover plates hide every screw
- Small clearance gaps. Runs with or without seals
- Solid brass body
- Tested to EN 14428, 100,000 cycles


ORDER CODES


DH-GG90-CH	Chrome
DH-GG90-BN	Brushed nickel
DH-GG90-MB	Matt black
DH-GG90-BB	Brushed brass
DH-GG90-BZ	Bronze
DH-GG90-GM	Gun metal
DH-GG90-BG	Brushed gun metal
DH-GG90-PB	Polished brass
DH-GG90-MW	Matt white
DH-GG90-BC	Brushed copper
DH-GG90-RG	Polished rose gold

Taken up in the profile, not in silicone.


WITH SEALS

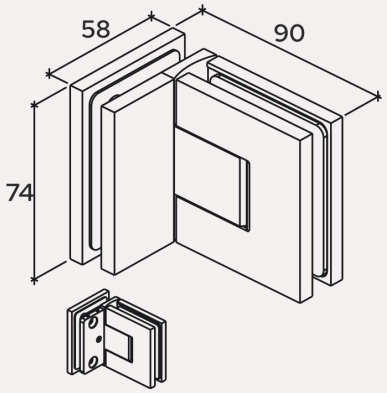


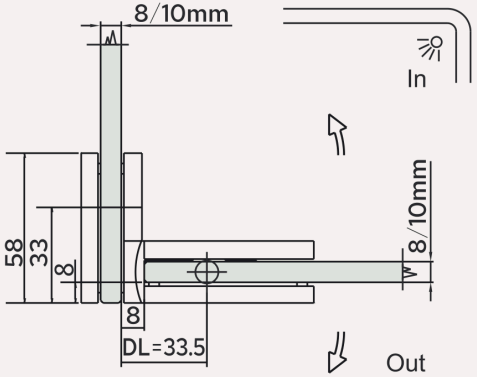


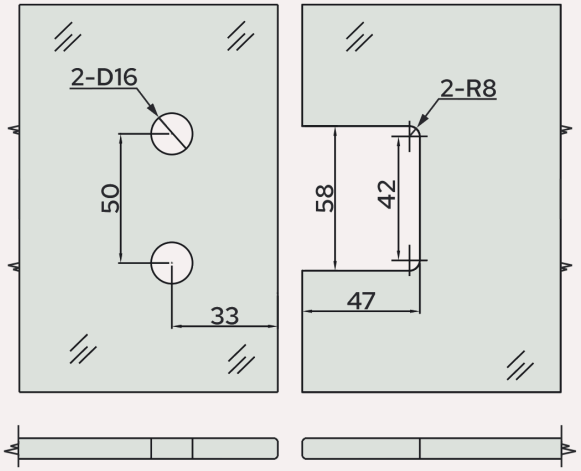


WITHOUT SEALS

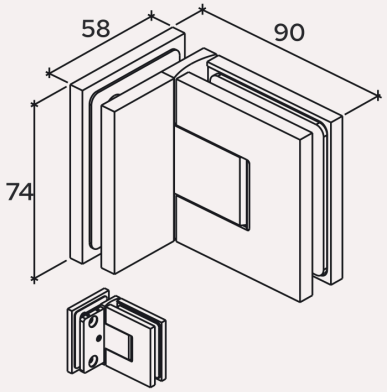

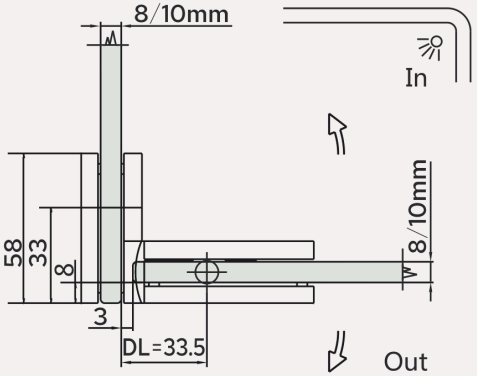

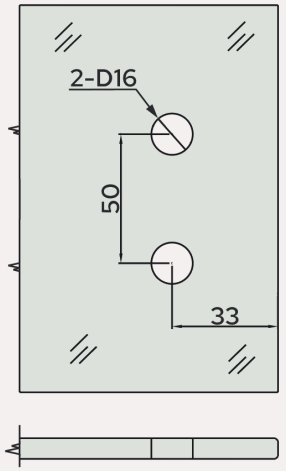

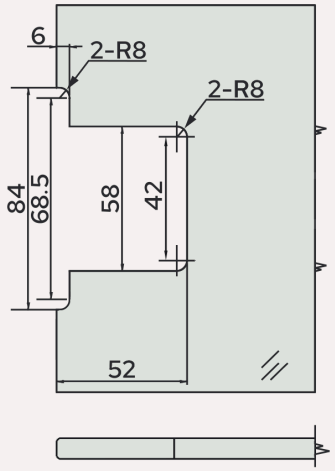

FITTING NOTES

Fixed panel takes 2 × Ø16 mm holes at 50 mm centres. Cover plates hide all screws.

SEALS

Seals sized to 8 or 10 mm glass. Tell us the glass and we'll send the right one with the order.

BEFORE YOU CUT

All dimensions in mm. Drawings not to scale. Check hole and notch positions against the surveyed opening before glass is ordered.