DATUM

SCREENS & HARDWARE · MADE TO SURVEY

HARDWARE · HINGES

# DH-GW180

## Hinge · glass to wall · 180°

Door inline with the wall at 180°. The wall leaf takes ±3 mm, so an out-of-plumb reveal is absorbed in the plate.



### SPECIFICATION

| | |
|---|---|
| Glass | 8, 10 mm toughened safety glass |
| Material | Solid brass |
| Max. door width | 1000 mm / 2 hinges |
| Max. door weight | 50 kg / 2 hinges |
| Opening | ±90°, double action |
| Self-closing | From approx. 25° |
| Size | 124 × 74 mm |
| Finishes | 3 — see order codes |

### WHAT IT DOES


- Slotted wall plate, 32 ±3 mm adjustment
- Self-closing from approx. 25°
- Zero position set on the hinge after hanging
- Cover plates hide every screw
- Small clearance gaps. Runs with or without seals
- Solid brass body
- Tested to EN 14428, 100,000 cycles

### ORDER CODES


| | |
|---|---|
| DH-GW180-CH | Chrome |
| DH-GW180-BN | Brushed nickel |
| DH-GW180-MB | Matt black |

Taken up in the profile, not in silicone.

## WITH SEALS

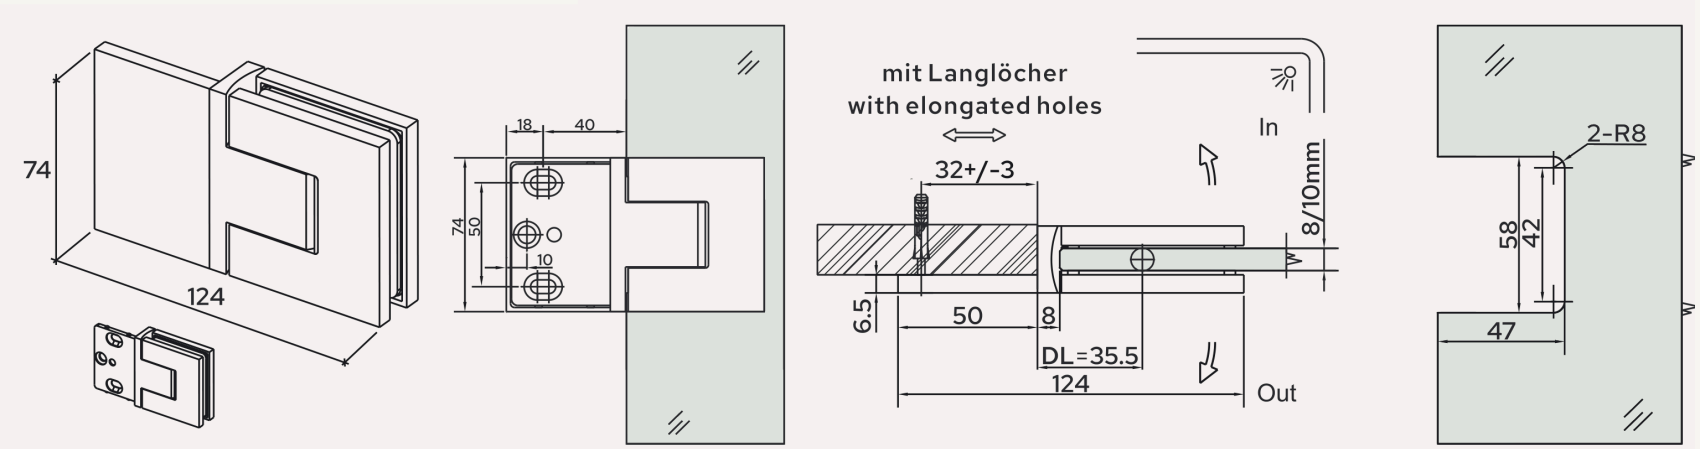


## WITHOUT SEALS

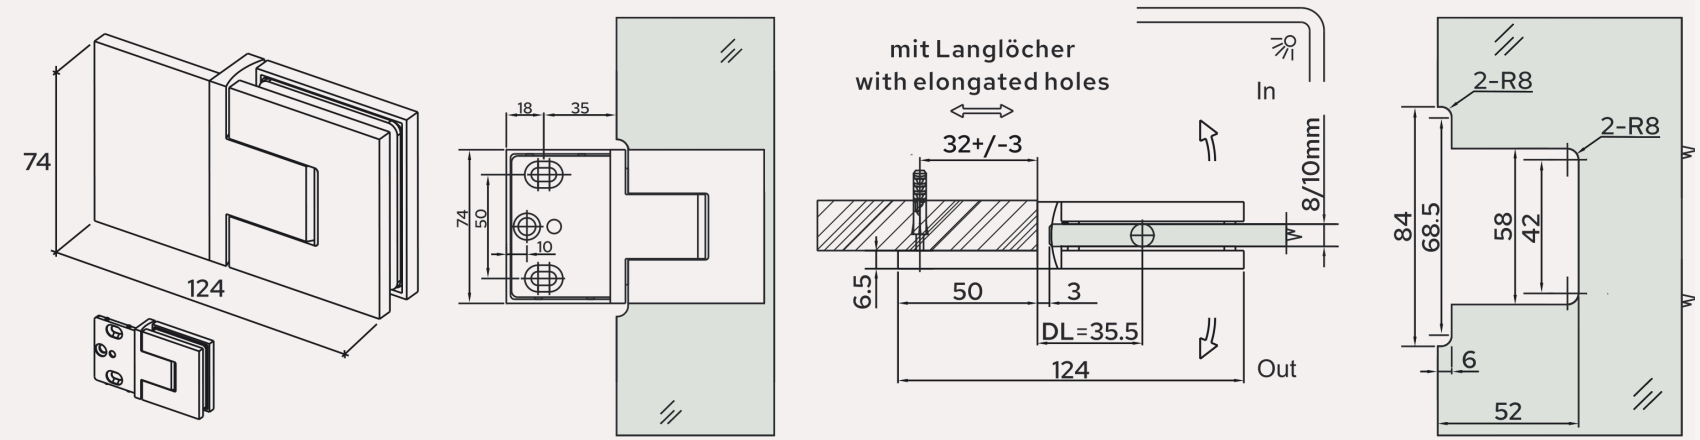


### FITTING NOTES

Wall plate with slotted holes, 32 +/−3 mm adjustment. Cover plates hide all screws.

### SEALS

Seals sized to 8 or 10 mm glass. Tell us the glass and we'll send the right one with the order.

### BEFORE YOU CUT

All dimensions in mm. Drawings not to scale. Check hole and notch positions against the surveyed opening before glass is ordered.